MIS Monitor

About
MIS Monitor is designed to invoke a screen lock after a period of inactivity while a monitored process is running. The period of inactivity and list of monitored applications are defined by an administrator in the registry. The application has no user-interface.


Installer
The installer will install the executable, any dependencies (libraries) and a registry entry to *HKLM\Software\Microsoft\Windows\CurrentVersion\Run* so that MIS Monitor will launch at user logon.
The installer has been tested on vanilla Windows XP, Windows 7 and RM CC3. The following settings are configured by default:

Setting	**Windows Installer Public Property**	**Default Value**
Timeout	TIMEOUT	45000 (milliseconds)
List of monitored processes	PROCESSES	Pulsar.exe

The installer can be customised (transformed) by specifying properties while installing, either with a transform file (.mst) or at the command line.

Command line
Msiexec.exe <source>\mis monitor.msi TIMEOUT=120000 PROCESSES=myfirst.exe;another.exe

Transform file (.mst)

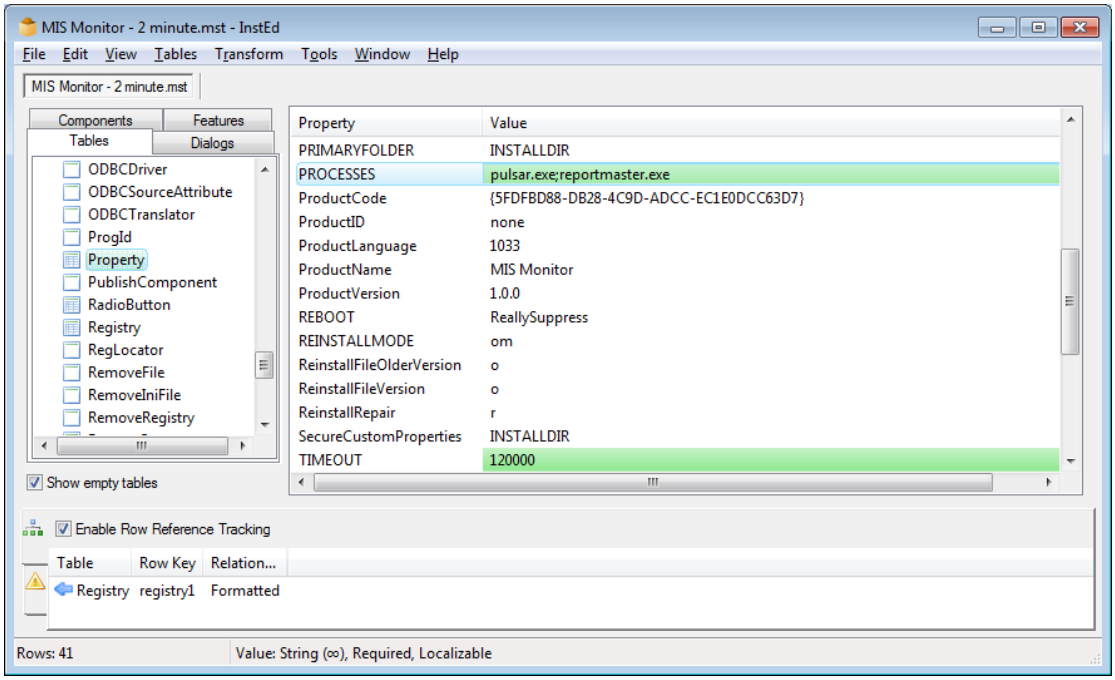

Configuration
The application's configuration is stored in the registry as per the table below:

Key and value	Data	Notes
HKLM\Software\Bushey Meads\MIS Monitor\Timeout	REG_DWORD Eg Decimal 120000	Period of inactivity (milliseconds) before invoking lock
HKLM\Software\Bushey Meads\MIS Monitor\Processes	REG_SZ (eg pulsar.exe)	List of processes delimited by semicolons.
HKCU\Software\Policies\Bushey Meads\MIS Monitor\Disable	REG_DWORD 0=Normal operation 1=Disables MIS Monitor	A per-user policy setting which causes the app to terminate if present.

Disclaimer
The software and installer are provided as-is without warranty or support.

Licence
This work is licensed under the Creative Commons Attribution-NonCommercial-NoDerivs 3.0 Unported License. To view a copy of this license, visit http://creativecommons.org/licenses/by-nc-nd/3.0/ or send a letter to Creative Commons, 444 Castro Street, Suite 900, Mountain View, California, 94041, USA.